

T ECHNICAL INFORMATION




Models No. ▶ 3601B

Description ▶ MAKITA Router

CONCEPTION AND MAIN APPLICATIONS

Based on the existing model 3600, this model is of the complete double insulation structure and designed to get easily familiar with us.

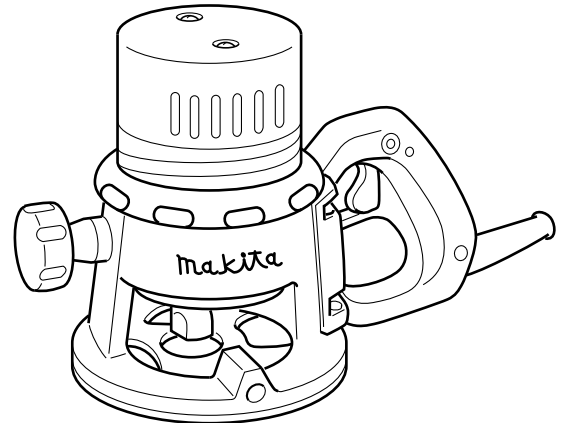

▶ Specifications

Voltage (V)	Current (A)	Cycle (Hz)	Consumed power(W)
100	10.0	50/60	930
No Load Speed(/min.)	23000 rpm.		
Capacity in Colette chuck dia.	ø12		
External size	310 in length x 160 in width x 191 in height		
Net Weight(kg)	3.8 kg		
Cord length(m)	5 m		

▶ Standard equipment

Same as model 3600.

▶ Optional accessories

Same as model 3600.

▶ Repair

Assembling :

1. For assembling the stay, set the punching R at the housing side so that the motor housing may not be damaged.
2. Assemble the base plate in a way that the center of the hole for mounting the template guide can be correctly fit with the center of the armature shaft.